


TUBE LIGHT

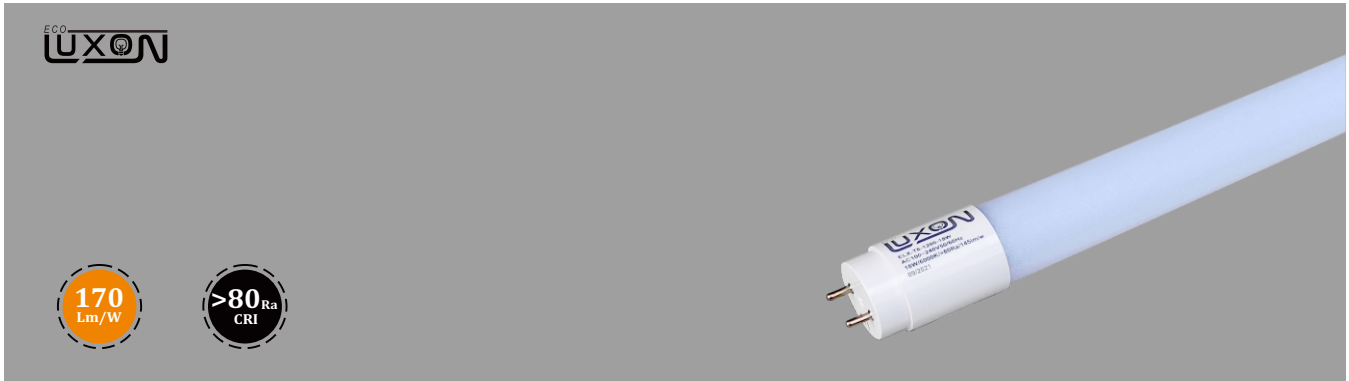

170
Lm/W


>80_{Ra}
CRI

Daya (W)	9W	18W
Input Voltage	AC100~265V	
Frequency Amp.	50/60Hz	
LED Efikasi	140/170Lm/W	
Total Lumen	1.260/1.530Lm	2.520/3.060Lm
CRI	>80Ra	
Temperatur Warna	3000K/6000K	
Proteksi	IP20	
Berat	72.5g	127g
Material	Nano PC Cover	

Model: ELX-T8-600-9W




Dimension (mm)

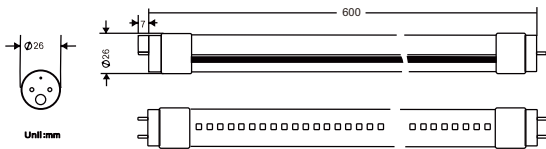


Model: ELX-T8-1200-18W




Dimension (mm)

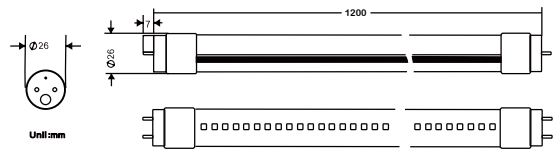

Light Distribution Curve

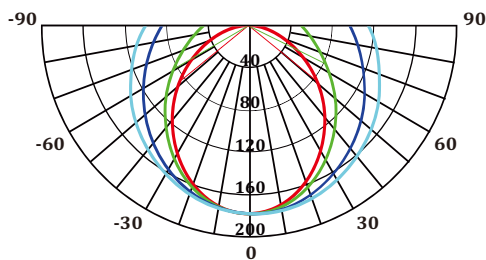


Light Distribution Curve

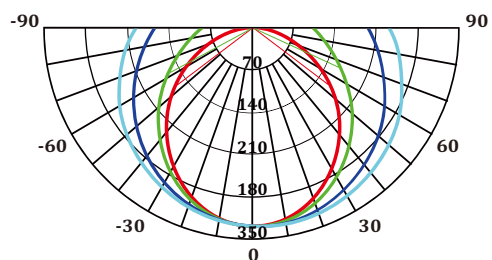

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle






TUBE LIGHT

ECO LUXON

140 Lm/W

>80 CRI

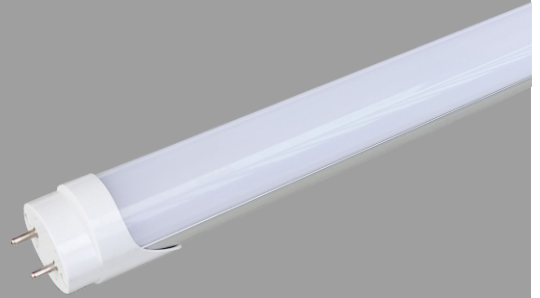

Daya (W)	9W	18W	25W
Input Voltage	AC100~265V		
Frequency Amp.	50/60Hz		
LED Efikasi	140Lm/W		
Total Lumen	1.260Lm	2.520Lm	3.500Lm
CRI	>80Ra		
Temperatur Warna	3000K/6000K		
Proteksi	IP20		
Berat	119.5g	212.5g	218.5g
Material	Aluminium + PC Cover		



Model: ELX-T8-600AL-9W

Model: ELX-T8-1200AL-18W
ELX-T8-1200AL-25W






Dimension (mm)

Dimension (mm)

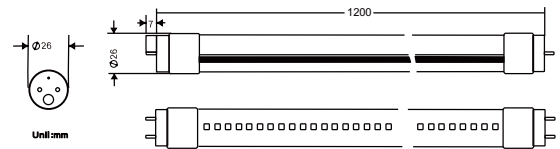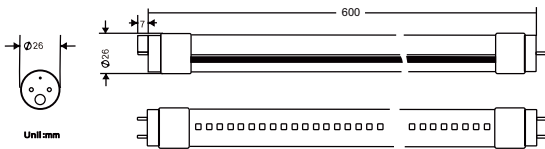

Light Distribution Curve

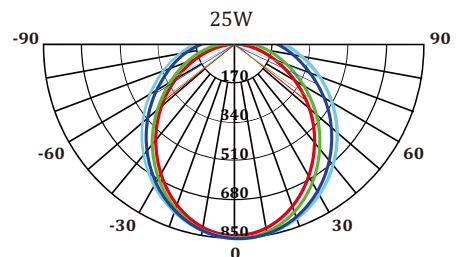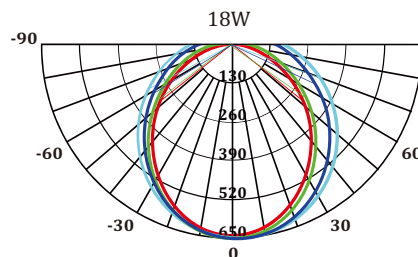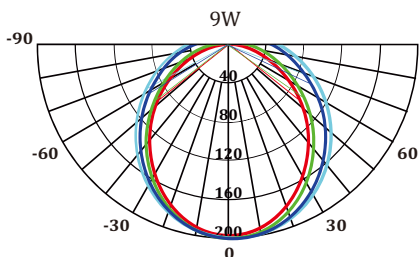

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





TUBE LIGHT




Daya (W)	10.5W
Input Voltage	AC100~265V
Frequency Amp.	50/60Hz
LED Efikasi	170Lm/W
Total Lumen	1.785Lm
CRI	>80Ra
Temperatur Warna	3000K/4000K/6000K
Proteksi	IP20
Berat	127g
Material	Nano PC Cover


Model: ZERN-T8-1200-10.5W



Dimension (mm)

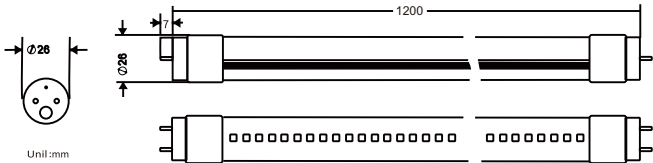


Light Distribution Curve

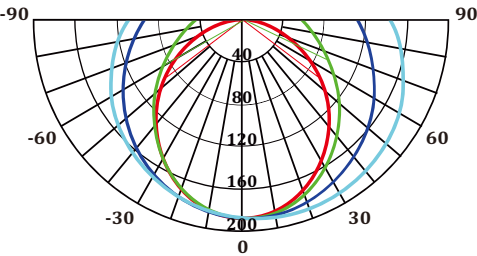

- 3.000K
- 4.000K
- 5.000K
- 6.000K

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle





TUBE LIGHT



140
Lm/W

>80
CRI




MOTIONSENSOR

0.9
PF


<20
THD

Daya (W)	9W	18W
Input Voltage	AC100~265V	
Frequency Amp.	50/60Hz	
LED Efikasi	140Lm/W	
Total Lumen	1.260Lm	2.520Lm
CRI	>80Ra	
Temperatur Warna	3000K/6000K	
Total Harmonic Distribution	<20	
Daya Standby	3W	6W
Berat	123.5g	226.5g
Material	PC Cover + Aluminium	


Model: ELX-T8-600SM-9W

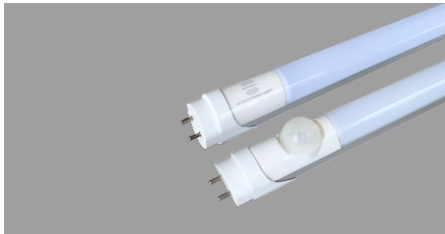


Model: ELX-T8-1200SM-18W

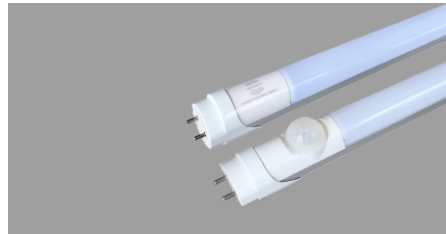


Dimension (mm)

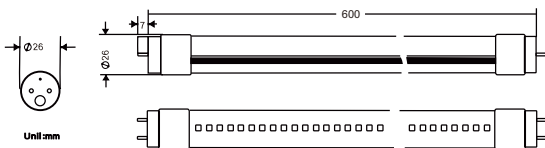


Dimension (mm)

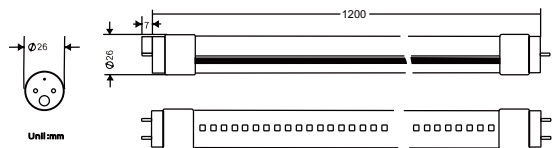

Light Distribution Curve

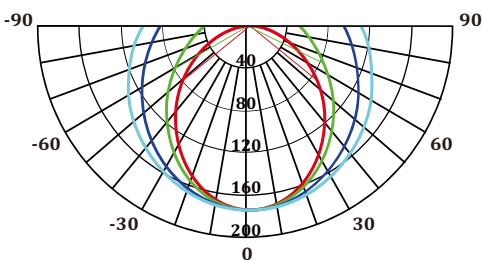


Light Distribution Curve

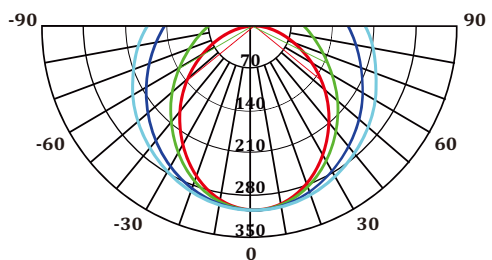


3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





TUBE LIGHT

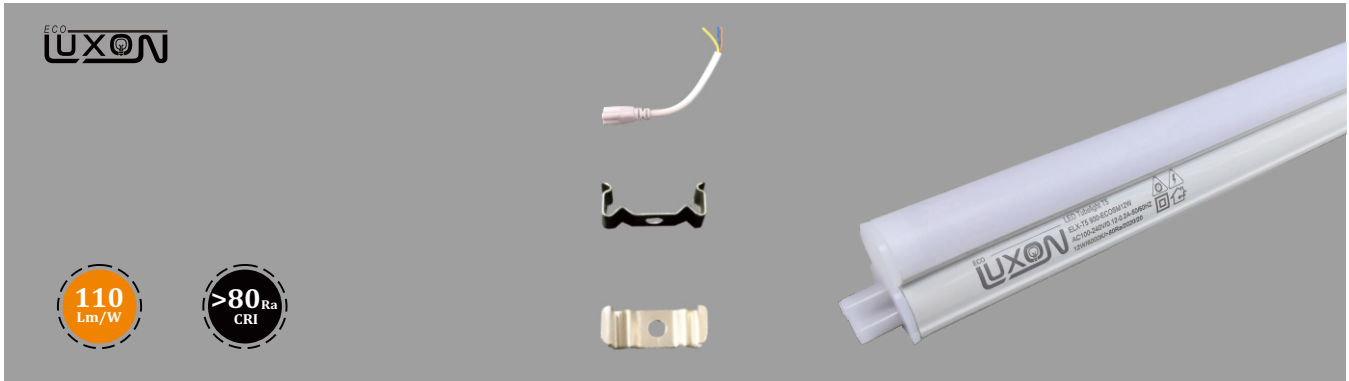


Daya (W)	4W	8W	12W	16W
Input Voltage	AC100~265V			
Frequency Amp.	50/60Hz			
LED Efikasi	110Lm/W			
Total Lumen	440Lm	880Lm	1.320Lm	1.760Lm
CRI	>80Ra			
Temperatur Warna	3000K/6000K			
Proteksi	IP20			
Berat	42g	65g	96g	118g
Material	Nano PC Cover			


Model: ELX-T5300-ECOSM-4W



Dimension (mm)




Light Distribution Curve




Model: ELX-T5600-ECOSM-8W



Dimension (mm)




Light Distribution Curve




Model: ELX-T5900-ECOSM-12W



Dimension (mm)




Light Distribution Curve




Model: ELX-T51200-ECOSM-16W



Dimension (mm)



Light Distribution Curve




- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DOWN LIGHT

ZERON
NEW LIGHT NEW LIFE



>80_{Ra}
CRI



0.9
PF

Daya (W)	20W	30W	40W
Input Voltage	AC175~265V		
Frequency Amp.	50/60Hz		
LED Efikasi	90Lm/W		
Total Lumen	1.800Lm	2.700Lm	3.600Lm
CRI	>80Ra		
Temperatur Warna	3000K/4000K/6000K		
Proteksi	IP20		
Berat	476g	616g	939g
Material	Die Casting Aluminium		

Model: ZERN-COBDH-ZRSM-20W

Dimension (mm)



Light Distribution Curve

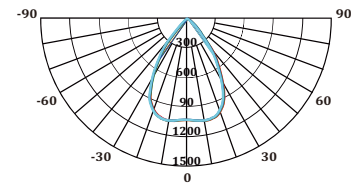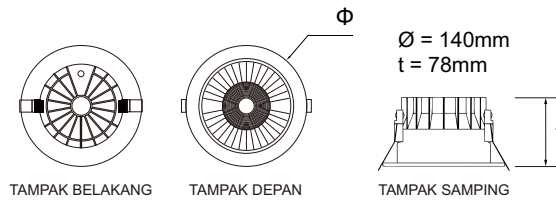

Model: ZERN-COBDH-ZRSM-30W

Dimension (mm)



Light Distribution Curve

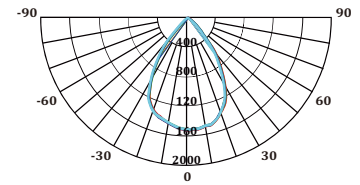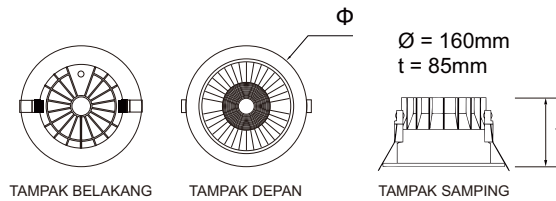

Model: ZERN-COBDH-ZRSM-40W

Dimension (mm)


Light Distribution Curve

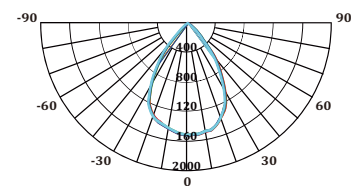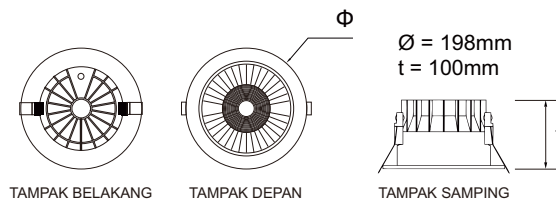

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle






DOWN LIGHT




Daya (W)	5W	8W	12W	15W
Input Voltage	AC85~265V			
Frequency Amp.	50/60Hz			
LED Efikasi	120Lm/W			
Total Lumen	600Lm	960Lm	1.440Lm	1.800Lm
CRI	>80Ra			
Temperatur Warna	3000K/4000K/6000K			
Proteksi	IP20			
Berat	93g	130g	238g	413g
Material	Die Casting Aluminium			


Model: ELX-ECDL-COB-5W



Dimension (mm)

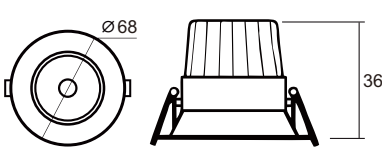


Light Distribution Curve




Model: ELX-ECDL-COB-8W




Dimension (mm)

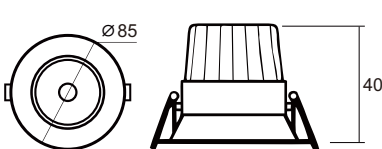


Light Distribution Curve




Model: ELX-ECDL-COB-12W




Dimension (mm)

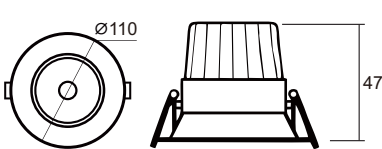


Light Distribution Curve




Model: ELX-ECDL-COB-15W



Dimension (mm)

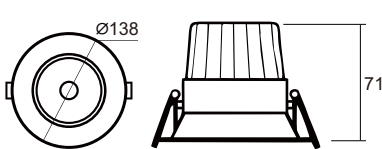


Light Distribution Curve



- 3.000K
- 4.000K
- 5.000K
- 6.000K

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle





DOWN LIGHT

ECO LUXON



110
Lm/W


>80
CRI

Daya (W)	6W	9W	12W	18W
Input Voltage	AC165~265V			
Frequency Amp.	50/60Hz			
LED Efikasi	110Lm/W			
Total Lumen	660Lm	990Lm	1.320Lm	1.980Lm
CRI	>80Ra			
Temperatur Warna	3000K/4000K/6000K			
Proteksi	IP20			
Berat	80g	110g	150g	210g
Material	Die Casting Aluminium			


Model: ELX-DL-SMD-6W



Dimension (mm)




Light Distribution Curve




Model: ELX-DL-SMD-9W



Dimension (mm)




Light Distribution Curve




Model: ELX-DL-SMD-12W



Dimension (mm)




Light Distribution Curve

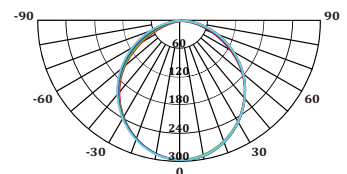


Model: ELX-DL-SMD-18W



Dimension (mm)



Light Distribution Curve



3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





MOISTURE PROOF





Daya(W)	14W	18W	24W
Input Voltage	AC100~265V		
Frequency Amp.	50/60Hz		
LED Efikasi	70Lm/W		
Total Lumen	980Lm	1.260Lm	1.680Lm
CRI	>80Ra		
Temperatur Warna	3000K-6000K		
Proteksi	IP65		
Beam Angle	160°		
Berat	560g	700g	900g
Working Temperature	-20~45°C		
Material	Aluminium + Glass		

Model: ELX-ECDL-MPF-14W

Dimension (mm)



Light Distribution Curve

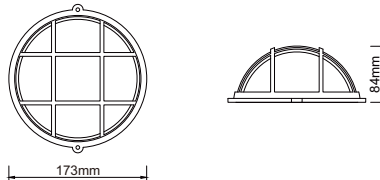

Model: ELX-ECDL-MPF-18W

Dimension (mm)



Light Distribution Curve

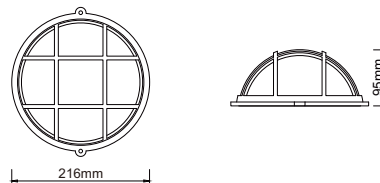

Model: ELX-ECDL-MPF-24W

Dimension (mm)


Light Distribution Curve

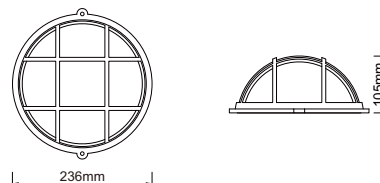

3.000K	4.000K	5.000K	6.000K
--------	--------	--------	--------

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DOWN LIGHT

ECO LUXON



100 Lm/W



>80 Ra CRI

Daya (W)	6W	9W	12W	18W	24W
Input Voltage	AC100~240V				
Frequency Amp.	50/60Hz				
LED Efikasi	100Lm/W				
Total Lumen	600Lm	900Lm	1.200Lm	1.800Lm	2.400Lm
CRI	>80Ra				
Temperatur Warna	3000K/4000K/6000K				
Proteksi	IP20				
Berat	110g	150g	190g	270g	470g
Material	Die Casting Aluminium				

Model: Round ELX-SLDL-6W

Dimension (mm)



Light Distribution Curve



Model: Round ELX-SLDL-9W

Dimension (mm)



Light Distribution Curve



Model: Round ELX-SLDL-12W

Dimension (mm)


Light Distribution Curve



Model: Round ELX-SLDL-18W

Dimension (mm)



Light Distribution Curve



Model: Round ELX-SLDL-24W

Dimension (mm)


Light Distribution Curve



3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DOWN LIGHT



100
Lm/W



>80
CRI

Daya (W)	6W	9W	12W	18W	24W
Input Voltage	AC100~265V				
Frequency Amp.	50/60Hz				
LED Efikasi	100Lm/W				
Total Lumen	600Lm	900Lm	1.200Lm	1.800Lm	2.400Lm
CRI	>80Ra				
Temperatur Warna	3000K/4000K/6000K				
Proteksi	IP20				
Berat	120g	180g	210g	330g	570g
Material	Die Casting Aluminium				

Model: Square ELX-SLDL-6W

Dimension (mm)



Light Distribution Curve



Model: Square ELX-SLDL-9W

Dimension (mm)



Light Distribution Curve



Model: Square ELX-SLDL-12W

Dimension (mm)



Light Distribution Curve



Model: Square ELX-SLDL-18W

Dimension (mm)



Light Distribution Curve



Model: Square ELX-SLDL-24W

Dimension (mm)


Light Distribution Curve



3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DOWN LIGHT

ECO LUXON



100 Lm/W




>80 CRI

Daya (W)	6W	9W	12W	18W	24W
Input Voltage	AC100~265V				
Frequency Amp.	50/60Hz				
LED Efikasi	100Lm/W				
Total Lumen	600Lm	900Lm	1.200Lm	1.800Lm	2.400Lm
CRI	>80Ra				
Temperatur Warna	3000K/6000K				
Proteksi	IP20				
Berat	150g	180g	240g	650g	580g
Material	Die Casting Aluminium				

Model: Round ELX-SMDL-6W

Dimension (mm)




Light Distribution Curve



Model: Round ELX-SMDL-9W

Dimension (mm)




Light Distribution Curve



Model: Round ELX-SMDL-12W

Dimension (mm)



Light Distribution Curve



Model: Round ELX-SLDL-18W

Dimension (mm)




Light Distribution Curve



Model: Round ELX-SMDL-24W

Dimension (mm)


Light Distribution Curve



3.000K 4.000K 5.000K 6.000K


- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DOWN LIGHT

ECO LUXON

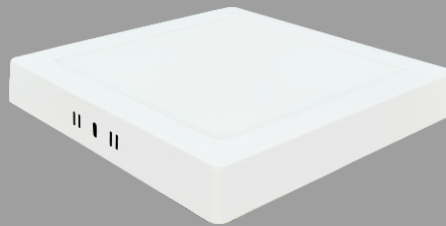


100 Lm/W


>80 CRI

Daya (W)	6W	9W	12W	18W	24W
Input Voltage	AC100~265V				
Frequency Amp.	50/60Hz				
LED Efikasi	100Lm/W				
Total Lumen	600Lm	900Lm	1.200Lm	1.800Lm	2.400Lm
CRI	>80Ra				
Temperatur Warna	3000K/6000K				
Proteksi	IP20				
Berat	160g	200g	250g	360g	620g
Material	Die Casting Aluminium				


Model: Square ELX-SMDL-6W




Dimension (mm)

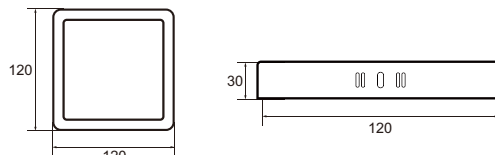


Light Distribution Curve




Model: Square ELX-SMDL-9W



Dimension (mm)

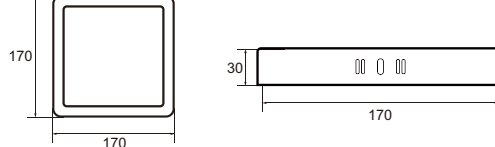


Light Distribution Curve




Model: Square ELX-SMDL-12W




Dimension (mm)

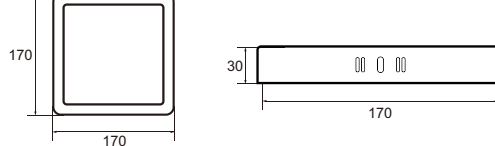


Light Distribution Curve




Model: Square ELX-SMDL-18W



Dimension (mm)

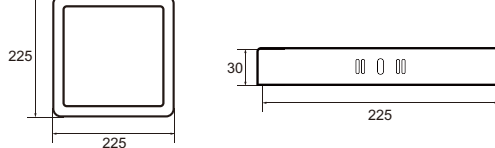


Light Distribution Curve




Model: Square ELX-SMDL-24W



Dimension (mm)

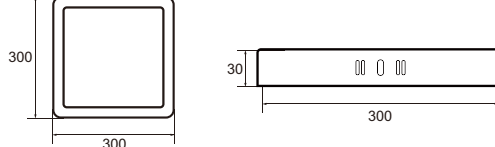


Light Distribution Curve

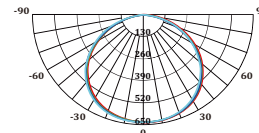

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





BULB

ECO LUXON



120
Lm/W


>80
CRI

Daya (W)	5W	7W	9W	12W	18W
Input Voltage	AC165~265V				
Frequency Amp.	50/60Hz				
LED Efikasi	120Lm/W				
Total Lumen	600Lm	840Lm	1.080Lm	1.440Lm	2.160Lm
CRI	>80Ra				
Temperatur Warna	3000K/4000K/6000K				
Proteksi	IP20				
Berat	21g	27g	29g	36.5g	50g
Material	Nano PC Cover + Aluminium				


Model: ELX-BL-5W



Dimension (mm)




Light Distribution Curve




Model: ELX-BL-7W



Dimension (mm)




Light Distribution Curve




Model: ELX-BL-9W



Dimension (mm)




Light Distribution Curve




Model: ELX-BL-12W



Dimension (mm)




Light Distribution Curve




Model: ELX-BL-18W



Dimension (mm)



Light Distribution Curve



3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





MR16




Daya (W)	5W	
Input Voltage	DC12V	AC100~240V
Frequency Amp.	50/60Hz	
LED Efikasi	85Lm/W	
Total Lumen	425Lm	
CRI	>80Ra	
Temperatur Warna	3000K/4000K/6000K	
Beam Angle	38°	
Berat	58.5g	29g
Material	Die Casting Aluminium	


Model: ELX-MRAC38-5W
ELX-MRDC38-5W



Dimension (mm)

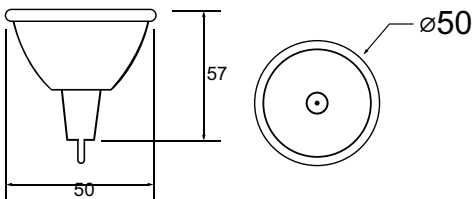

Light Distribution Curve

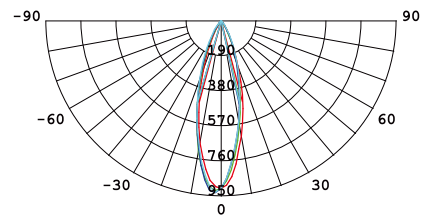

Application



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





MR16

ECO LUXON

100 Lm/W

>90 Ra CRI

CREE





Daya (W)	6W	
Input Voltage	DC12V	
Frequency Amp.	50/60Hz	
LED Efikasi	100Lm/W	
Total Lumen	600Lm	
CRI	>90Ra	
Temperatur Warna	3000K/4000K/6000K	
Beam Angle	15°	24°
Berat	43.5g	40g
Material	Die Casting CNC Aluminium	

Model: ELX-MRDC15HQ-6W

Dimension (mm)



Light Distribution Curve

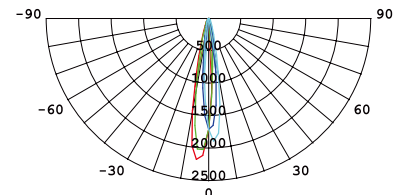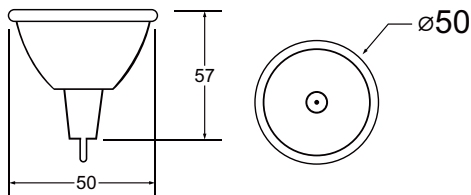

Model: ELX-MRDC24HQ-6W

Dimension (mm)

Light Distribution Curve

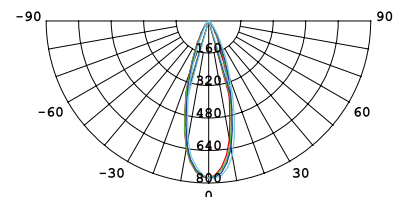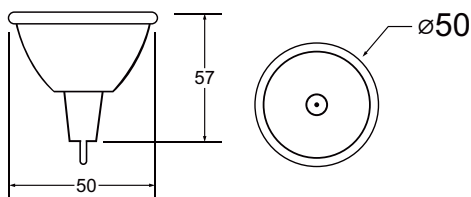

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





PAR30



100
Lm/W


>80_{Ra}
CRI

Daya (W)	30W
Input Voltage	AC180~240V
Frequency Amp.	50/60Hz
LED Efikasi	100Lm/W
Total Lumen	3.000Lm
CRI	>80Ra
Temperatur Warna	3000K/4000K/6000K
Beam Angle	15°24°36°
Berat	394g
Material	Aluminium Die Casting


Model: ELX-LSP359-30W



Dimension (mm)




Light Distribution Curve

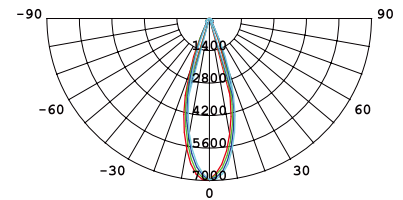


Model: ELX-LSP359TJFC-30W



Dimension (mm)



Light Distribution Curve

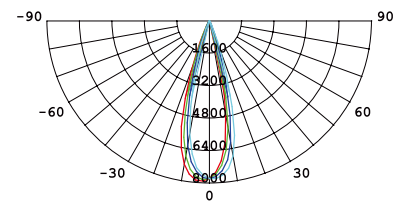

3.000K	4.000K	5.000K	6.000K
--------	--------	--------	--------

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





TRACK LIGHT

ECO LUXON





100 Lm/W

>80 Ra CRI


Daya (W)	10W	20W	30W
Input Voltage	AC180~240V		
Frequency Amp.	50/60Hz		
LED Efikasi	100Lm/W		
Total Lumen	1.000Lm	2.000Lm	3.000Lm
CRI	>80Ra		
Temperatur Warna	3000K/4000K/6000K		
Beam Angle	30°		
Berat	180g	300g	400g
Material	Die Casting Aluminium		

Model: ELX-JKTLJ610-10W

Dimension (mm)





Light Distribution Curve

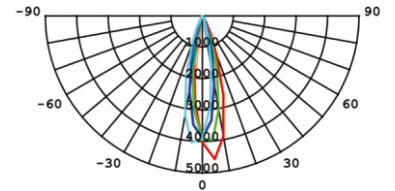


Model: ELX-JKTLJ610-20W

Dimension (mm)





Light Distribution Curve

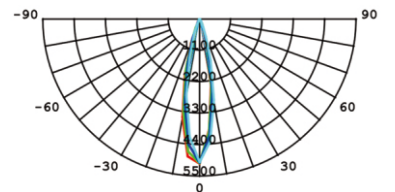


Model: ELX-JKTLJ610-30W

Dimension (mm)



Light Distribution Curve

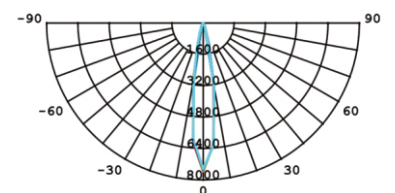

3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle






STRIP LIGHT



LED Type	2835	5050
Daya (W)	9.6W/M(120LED)	14.8W/M(60LED)
Input Voltage	DC12V	
Frequency Amp.	50/60Hz	
LED Efikasi	1.152Lm/M	1.776Lm/M
Total Lumen		
CRI	>90Ra	
Temperatur Warna	3000K/4000K/6000K	
Proteksi	IP20	
Unit	5Meter/Roll	
Material	Polymide	

Color




Cutting off



Connector



Application

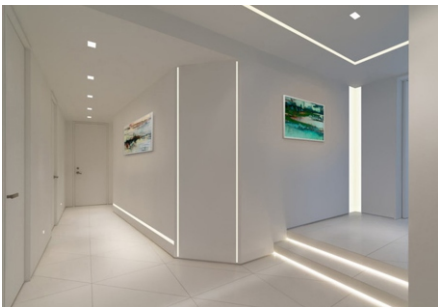


- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





FLAT LIGHT

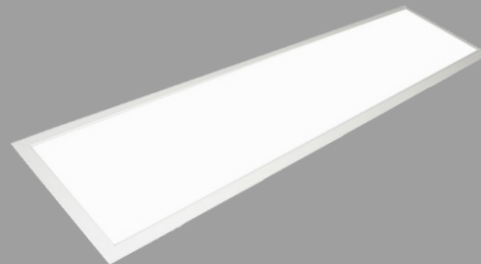

120
Lm/W


>80_{Ra}
CRI

Model	ELX-FLTB-ECOFLPJ	
Daya (W)	36W	48W
Input Voltage	AC200~265V	
Frequency Amp.	50/60Hz	
LED Efikasi	120Lm/W	
Total Lumen	4.320Lm	5.760Lm
CRI	>80Ra	
Temperatur Warna	4000K/6000K	
Proteksi	IP20	
Berat	2.4kg	2.5kg
Material	Die Casting Aluminium	


External Type



Dimension (mm)

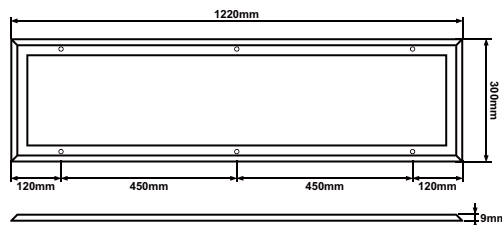


Light Distribution Curve

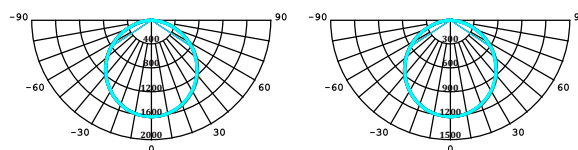


Internal Type



Dimension (mm)

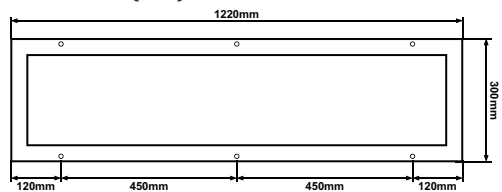

Light Distribution Curve

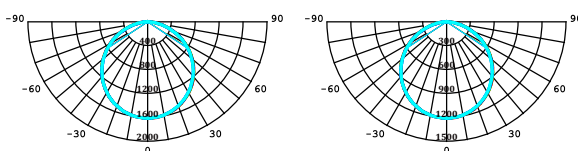


3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





FLAT LIGHT

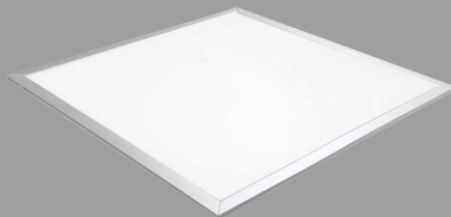

120
Lm/W




>80_{Ra}
CRI

Model	ELX-FLT-ECOFLKT	
Daya (W)	36W	48W
Input Voltage	AC200~265V	
Frequency Amp.	50/60Hz	
LED Efikasi	120Lm/W	
Total Lumen	4.320Lm	5.760Lm
CRI	>80Ra	
Temperatur Warna	4000K/6000K	
Proteksi	IP20	
Berat	2kg	2kg
Material	Die Casting Aluminium	


Dimension (mm)

Thick Type

Thin Type



Light Distribution Curve

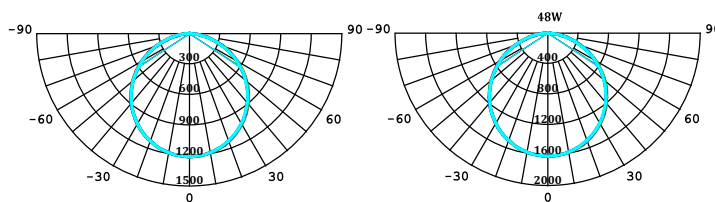


Application



3.000K 4.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





RACEWAY



ECO
LUXON

140
Lm/W


>80
CRI

Daya (W)	18W	36W
Input Voltage	AC170~265V	
Frequency Amp.	50/60Hz	
LED Efikasi	140Lm/W	
Total Lumen	2.520Lm	5.040Lm
CRI	>80Ra	
Temperatur Warna	5000K	
Dimensi	590 x 75 x 55 mm	1.180 x 75 x 55 mm
Berat	1kg	2kg
Material	Die Casting Aluminium + PS	


Model : ELX-LILT60-18W



Dimension (mm)

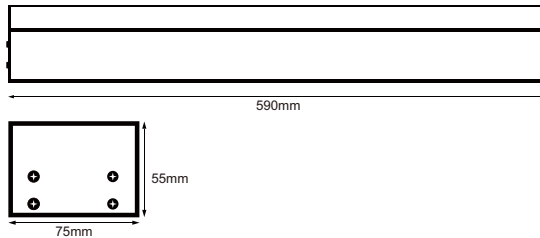


Light Distribution Curve

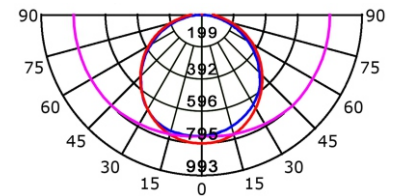


Model : ELX-LILT120-36W







Dimension (mm)

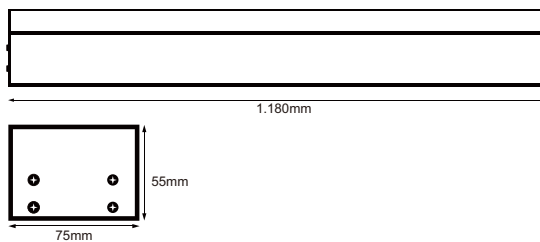

Light Distribution Curve

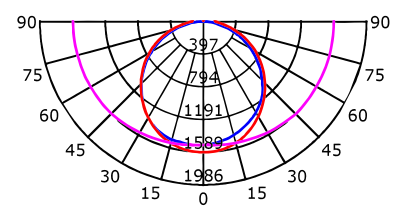


Accessories



3.000K 5.000K 6.000K

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





DUSTPROOF LIGHT




Daya (W)	20W	40W	50W
Input Voltage	AC100~265V		
Frequency Amp.	50/60Hz		
LED Efikasi	90Lm/W		
Total Lumen	1.800Lm	3.600Lm	4.500Lm
CRI	>80Ra		
Temperatur Warna	3000K/6000K		
Proteksi	IP 20		
Berat	350g	450g	550g
Material	Aluminium + PC Cover		


Model : ELX-LIDT-20W
 ELX-LIDT-40W
 ELX-LIDT-50W



Dimension (mm)



Light Distribution Curve

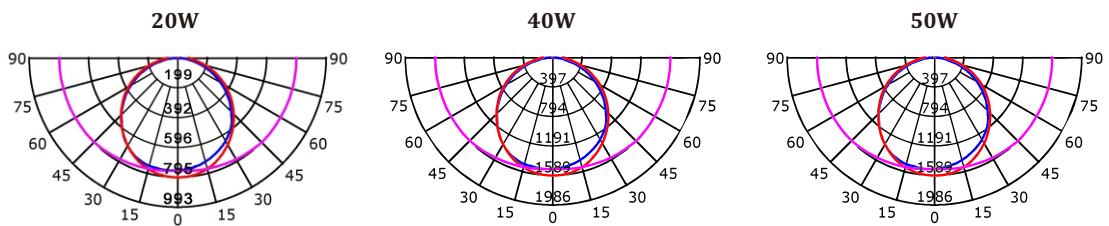

- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





EMERGENCY LIGHT



Twin-Head Emergency Light

ELX-EML1180-3W

Daya (W)	2x3W
Input Voltage	200-240V AC
Frequency Amp.	50/60Hz
Battery Voltage	3.6 V
Battery Capacity	300 mAh
Emergency Time	3 Hours
Charging Time	24 Hours
Indicator	Charger, Power
Temp. Warna	6500K
Material	Fire Retardant Plastic



Art-Emergency Downlight

ELX-WM90-6W

Daya (W)	6W
Input Voltage	220V ± 10%
Frequency Amp.	50/60Hz
Battery Voltage	6500K
Battery Capacity	2.400mAh/3.2 V
Emergency Time	180 Menit
Charging Time	24 Hours
Emergency Power	3W
Temp. Warna	Ø120 x 85 mm
Material	Injection-molded thermoplastic ABS Housing UL-94V-0 flame rating, fire resistant



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle







EMERGENCY LIGHT



Exit Lamp Emergency

ELX-EXIT60LIT-3W

Daya (W)	3W
Input Voltage	200-240V AC
Frequency Amp.	50/60Hz
Battery Voltage	3.6 V
Battery Capacity	300 mAh
Emergency Time	3 Hours
Charging Time	24 Hours
Indicator	Charger, Power
Temp. Warna	6500K
Material	Fire Retardant Plastic

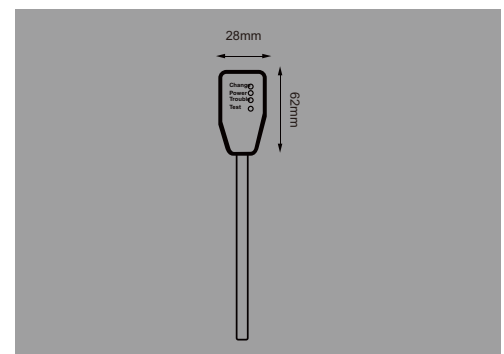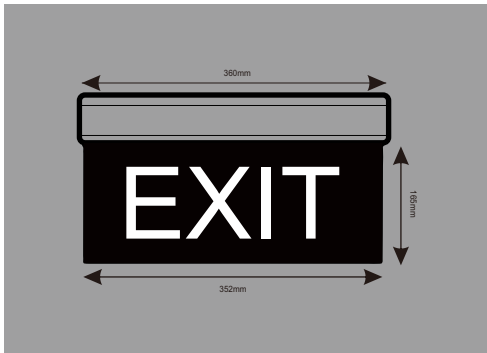


- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle





ACCESSORIES

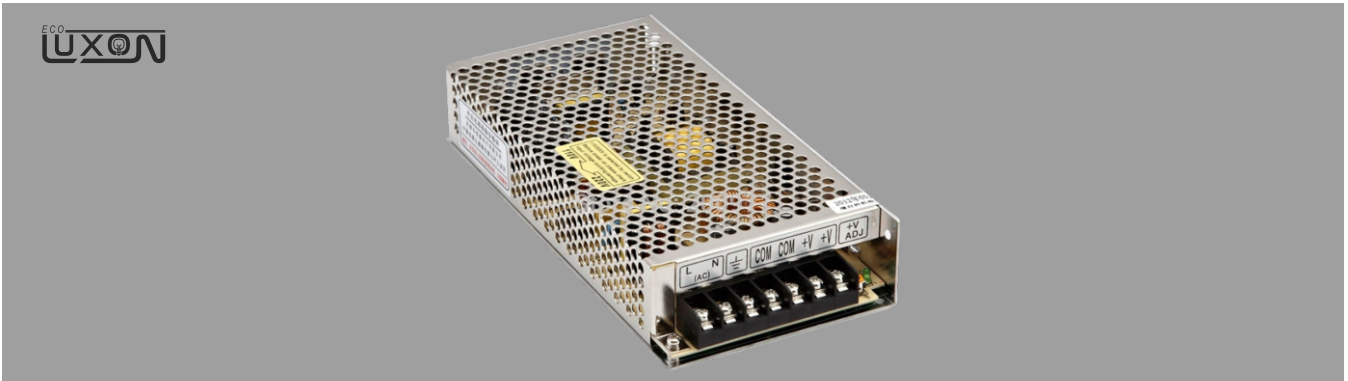

SMPS Indoor

Daya Maksimal	36W	60W	120W	180W
Input Voltage	AC100-265V			
Output Voltage	DC12V			
Frequency Amp.	50/60HZ			
Output Ampere	3A	5A	10A	15A
Material	Aluminium			
Proteksi	IP20			
Dimensi	85x58x33mm	110x78x35mm	198x98x41mm	198x98x41mm
Berat	225gr	354gr	512gr	558gr



SMPS Outdoor

Daya Maksimal	50W	100W
Input Voltage	AC 90-250V	
Output Voltage	DC 12V	
Frequency Amp.	50/60Hz	
Input Ampere	AC 1.2~0.45 A	AC 2 A
Output Ampere	DC 4.16 A	DC 8.33 A
Proteksi	IP 68	
Berat	400gr	936gr
Material	Aluminium Die Casting	

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle





ACCESSORIES



SMPS

Driver MR16

Daya Maksimal	8W
Input Voltage	AC 85~265V
Output Voltage	DC 12V
Frequency Amp.	50/60Hz
Intput Ampere	AC 36 mA
Output Ampere	DC 600 mA
Proteksi	IP 20
Berat	28 gr
Material	Plastik



SMPS

Driver Dimmable Ecoluxon

Daya Maksimal	18W
Input Voltage	DC 15~60V
Output Voltage	DC 12V
Frequency Amp.	50/60Hz
Intput Ampere	AC 810 mA
Output Ampere	DC 280 mA
Proteksi	IP 20
Berat	47 gr
Material	Plastik

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle





ACCESSORIES



Emergency Battery

Daya Maksimal	28W
Input Voltage	AC 220 ± 10%
Output Voltage	AC 200~240V
Frequency Amp.	50/60 Hz
Output Ampere	2.400 mAh
Material	Lithium Battery
Dimensi	140x48x35mm
Berat	400gr
Material	Plastic Fire Reterdant




Emergency Battery

Daya Maksimal	50W
Input Voltage	AC 220 ± 10%
Output Voltage	AC 200~240V
Frequency Amp.	50/60 Hz
Battery Capacity	6.400 mAh
Battery Type	Lithium Battery
Dimensi	200x70x45mm
Berat	936gr
Material	Aluminium

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle





ACCESSORIES



Downlight Fixture

Reflector Type	Sandblast		Chrome	
	3.5 inch	4 inch	5 inch	6 inch
Type				
Fitting	E27 Ceramic			
Daya Maksimal	100W			
Cut Off	889mm	1.016mm	1.270mm	1.524mm
Material	Aluminium			



MR16 Fixture

Type	ADJ1	ADJ2
Fitting	GU5.3	
Daya Maksimal	50W	
Cut Off	Front Open	Put-back
Material	Plastic	

* Easy maintenance
 - Modular LED for easy replacement
 - Opening and closing possible of LED module part and power supply part
 - Customizable beam angle

