




EXPLOSION PROOF

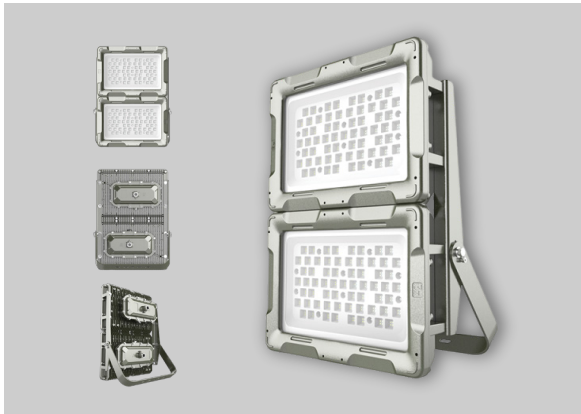

OHUI® Explosion Proof Zeron OH-Ex8266-BS

Specification

Executive Standart	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.1 GB3836.2	350W	AC100-270V 50/60Hz	28kg	Ø632x469x195mm	>75Ra	>0.95	90°	IP66
	400W	AC100-270V 50/60Hz	28kg	Ø632x469x195mm	>75Ra	>0.95	90°	IP66
	440W	AC100-270V 50/60Hz	28kg	Ø632x469x195mm	>75Ra	>0.95	90°	IP66
	480W	AC100-270V 50/60Hz	28kg	Ø632x469x195mm	>75Ra	>0.95	90°	IP66
Anticorrosion Grade		Light Effect		Introduction Device		Explosion Proof Mark		
WF2		120lm/W		G3/4"ø8mm-ø14mm		Ex d IIC T6 Gb/Ex TD A2I T80°C		

