




EXPLOSION PROOF

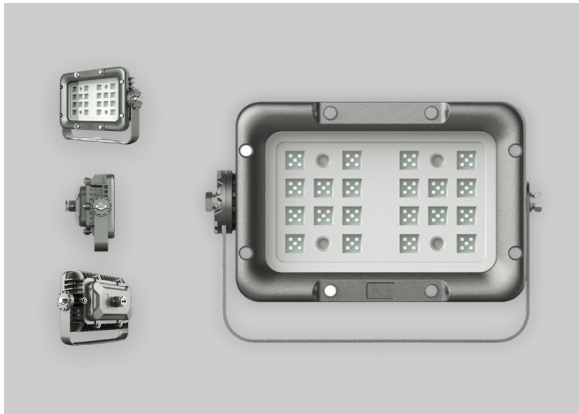

OHUI®


Explosion Proof Zeron

OH-Ex8189


Specification

Executive Standart	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.1	30W	AC220~240V 50/60Hz	3.8kg	Ø299X186X137mm	>70Ra	>0.95	90°	IP66
GB3836.2	80W	AC220~240V 50/60Hz	3.8kg	Ø299X186X137mm	>70Ra	>0.95	90°	IP66
Anticorrosion Grade		Light Effect		Introduction Device		Explosion Proof Mark		
WF2		110lm/W		G3/4"ø8mm-ø14mm		Ex d e mb IIC T6 Gb		

Dimension (mm)

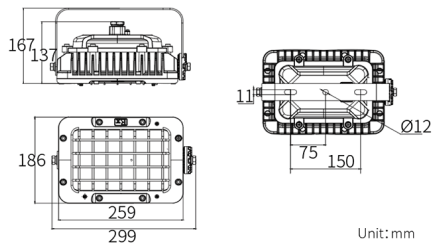

Light Distribution Curve

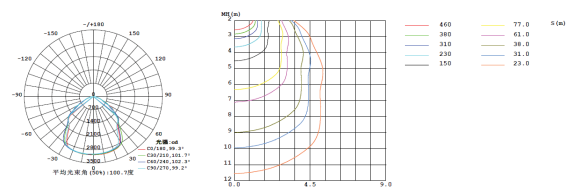

Installation Mode

