




EXPLOSION PROOF

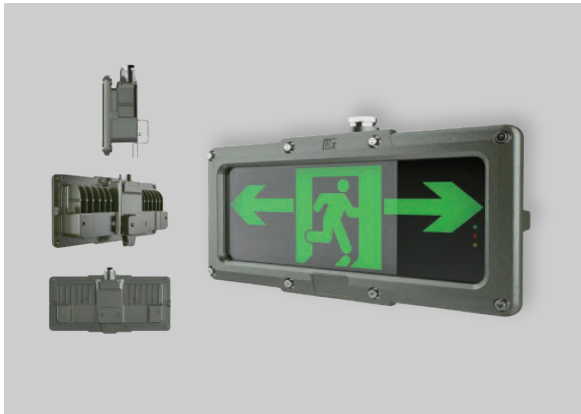

OHUI®

Explosion Proof Zeron

OH-Ex8191

Specification

Executive Standart	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Cable Entry	Discharger Time	Protection Level
GB3836.1	3W	AC100-273V 50/60Hz	2.8kg	Ø350X193X79mm	>75Ra	Ø8-Ø14mm	120MIN	IP66
GB3836.2		AC100-273V 50/60Hz	2.8kg	Ø350X193X79mm	>75Ra	Ø8-Ø14mm	120MIN	IP66
GB12476.1		AC100-273V 50/60Hz	2.8kg	Ø350X193X79mm	>75Ra	Ø8-Ø14mm	120MIN	IP66
GB12476.5		AC100-273V 50/60Hz	2.8kg	Ø350X193X79mm	>75Ra	Ø8-Ø14mm	120MIN	IP66
Anticorrosion Grade		Charging Time		Introduction Device		Explosion Proof Mark		
WF2		48H		G3/4"ø8mm-ø14mm		Ex d IIB T6		

