




EXPLOSION PROOF

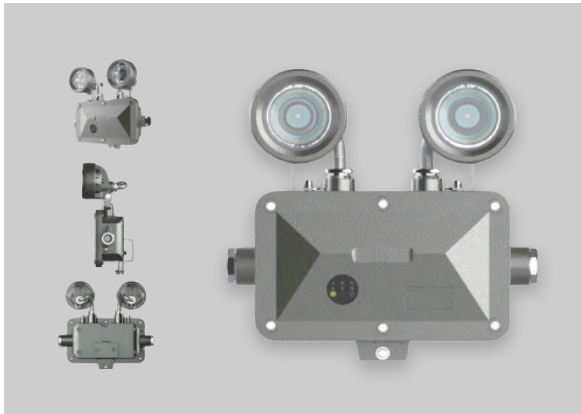

OHUI®


Explosion Proof Zeron

OH-Ex8190

Specification

Executive Standart	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Discharger Time	Cable Entry	Protection Level
GB3836.1	2X3W	AC110-273V 50/60Hz	2.5kg	Ø230X260X85mm	>75Ra	120MIN	Ø8-Ø14mm	IP66
GB3836.2		AC110-273V 50/60Hz	2.5kg	Ø230X260X85mm	>75Ra	120MIN	Ø8-Ø14mm	IP66
GBI2476.1		AC110-273V 50/60Hz	2.5kg	Ø230X260X85mm	>75Ra	120MIN	Ø8-Ø14mm	IP66
GBI2476.5		AC110-273V 50/60Hz	2.5kg	Ø230X260X85mm	>75Ra	120MIN	Ø8-Ø14mm	IP66
Anticorrosion Grade			Introduction Device			Explosion Proof Mark		
WF2			G3/4"ø8mm-ø14mm			Ex d IIB T6		

Dimension (mm)



Installation Mode

