




EXPLOSION PROOF

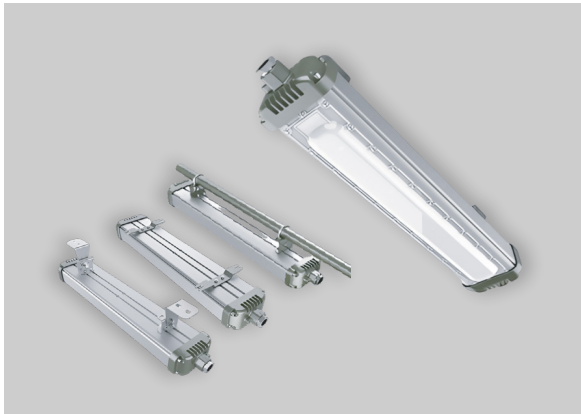

OHUI®


Explosion Proof Zeron

OH-Ex8192-600

Specification

Executive Standard	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.1 GB3836.9	20W	AC220~240V 50/60Hz	3.2kg	Ø635X125X77mm	>75Ra	>0.95	120°	IP66
	40W	AC220~240V 50/60Hz	3.2kg	Ø635X125X77mm	>75Ra	>0.95	120°	IP66
	60W	AC220~240V 50/60Hz	3.2kg	Ø635X125X77mm	>75Ra	>0.95	120°	IP66
Anticorrosion Grade		Light Effect		Total Lumen		Explosion Proof Mark		
WF2		120Lm/W		2.400 Lm 4.800Lm 7.200Lm		Ex nR IIC T6 Gc/Ex tD A21 IP66 T80°C		

Dimension (mm)

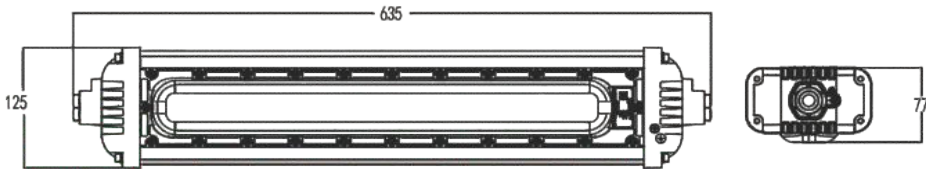

Installation Mode

