



EXPLOSION PROOF



OHUI®


Explosion Proof Zeron

OH-Ex8192-1200

Specification

Executive Standard	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.1 GB3836.9	70W	AC220~240V 50/60Hz	4.4kg	Ø1143X125X77mm	>70Ra	>0.95	120°	IP66
	100W	AC220~240V 50/60Hz	4.4kg	Ø1143X125X77mm	>70Ra	>0.95	120°	IP66
	120W	AC220~240V 50/60Hz	4.4kg	Ø1143X125X77mm	>70Ra	>0.95	120°	IP66
Anticorrosion Grade		Light Effect		Introduction Device		Explosion Proof Mark		
WF2		120Lm/W		G3/4"ø8mm-ø14mm		Ex nR IIC T6 Gc/Ex tD A21 IP66 T80°C		

Dimension (mm)

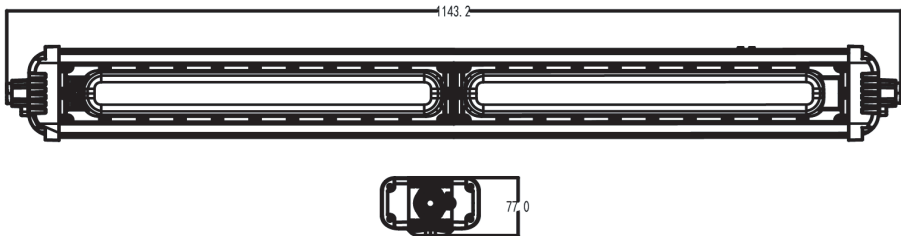

Installation Mode

