




EXPLOSION PROOF

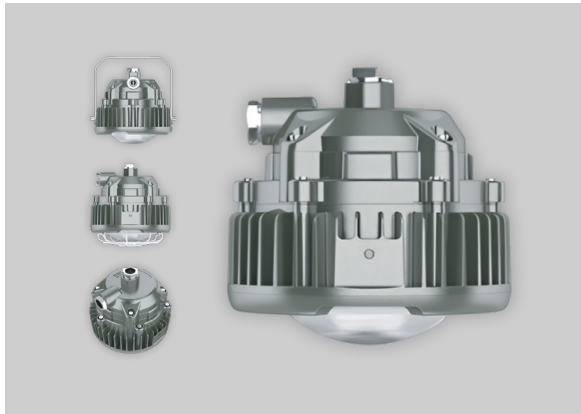

OHUI®


Explosion Proof Zeron

OH-Ex8230-BS


■ Specification

Executive Standard	Rated Power	Rated Voltage	Weight	Size	Color Rendering	Power Factor	Beam Angle	Protection Level
GB3836.1	30W	AC220~240V 50/60Hz	3.02kg	Ø180x182mm	>75Ra	>0.95	120°	IP66
GB3836.2	50W	AC220~240V 50/60Hz	3.02kg	Ø180x182mm	>75Ra	>0.95	120°	IP66
Anticorrosion Grade		Light Effect		Introduction Device		Explosion Proof Mark		
WF2		120Lm/W		G3/4"ø8mm-ø14mm		Ex d IIC T6 Gb/Ex TD A21 T80°C		

Dimension (mm)

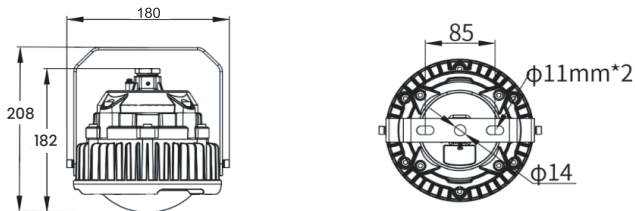

Light Distribution Curve

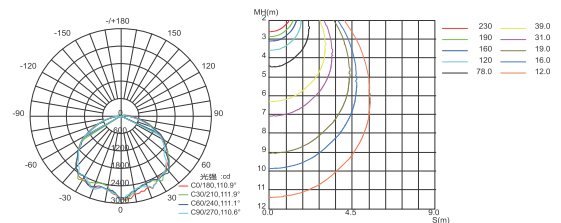

Installation Mode

