




FLOOD LIGHT

Outdoor Light | Flood Light

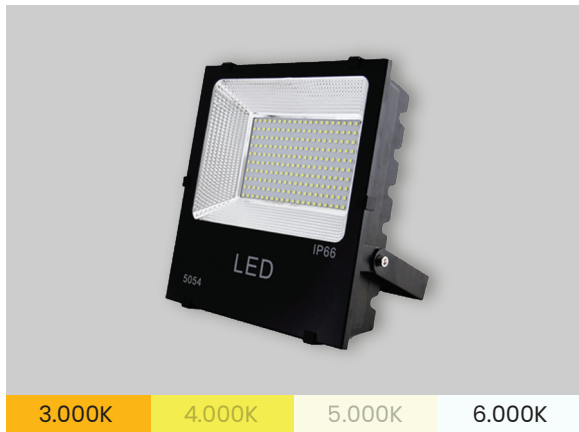

Flood Light Ecoluxon ELX-FL-ECOSM





■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Beam Angle	Berat	Material
30W	AC200-240V	50/60Hz	100Lm/W	3.000Lm	>70Ra	3000K/6000K	IP66	90°	0.6kg	Die Casting Aluminium
50W	AC200-240V	50/60Hz	100Lm/W	5.000Lm	>70Ra	3000K/6000K	IP66	90°	1.05kg	Die Casting Aluminium
100W	AC200-240V	50/60Hz	100Lm/W	10.000Lm	>70Ra	3000K/6000K	IP66	90°	1.34kg	Die Casting Aluminium
150W	AC200-240V	50/60Hz	100Lm/W	15.000Lm	>70Ra	3000K/6000K	IP66	90°		Die Casting Aluminium


Model : ELX-FL-ECOSM-30W



Dimension (mm)





Light Distribution Curve




Model : ELX-FL-ECOSM-50W



Dimension (mm)





Light Distribution Curve




Model : ELX-FL-ECOSM-100W



Dimension (mm)





Light Distribution Curve




Model : ELX-FL-ECOSM-150W



Dimension (mm)



Light Distribution Curve

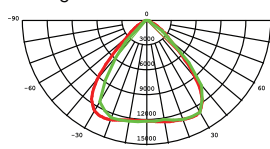

* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

