



STREET LIGHT

Outdoor Light | Street Light



ZERON
NEW LIGHT NEW LIFE

All In One Solar Light

ELE-20



3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Frequency Amp	LED Efikasi	Total Lumen	CRI	Proteksi	Life Po4 Battery	Charging Time	Material
20W	50/60Hz	160Lm/W	3.200Lm	>80Ra	IP65	12.8V, 48Ah	12 Hours	Die Casting Aluminium
30W	50/60Hz	160Lm/W	4.800Lm	>80Ra	IP65	12.8V, 72Ah	12 Hours	Die Casting Aluminium
40W	50/60Hz	160Lm/W	6.400Lm	>80Ra	IP65	12.8V, 96Ah	12 Hours	Die Casting Aluminium
50W	50/60Hz	160Lm/W	8.000Lm	>80Ra	IP65	12.8V, 120Ah	12 Hours	Die Casting Aluminium
60W	50/60Hz	160Lm/W	9.600Lm	>80Ra	IP65	12.8V, 144Ah	12 Hours	Die Casting Aluminium


Model : ELE-20-20W



Dimension (mm)

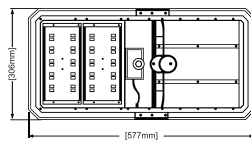


Light Distribution Curve




Model : ELE-20-30W



Dimension (mm)

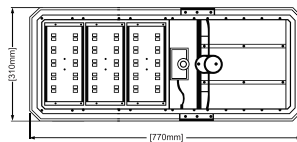


Light Distribution Curve




Model : ELE-20-40W



Dimension (mm)

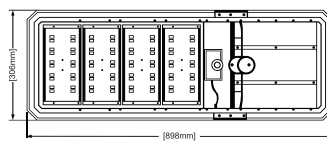


Light Distribution Curve




Model : ELE-20-50W



Dimension (mm)

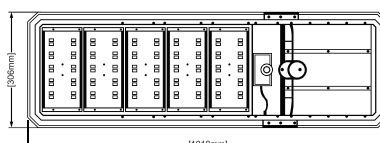


Light Distribution Curve




Model : ELE-20-60W



Dimension (mm)

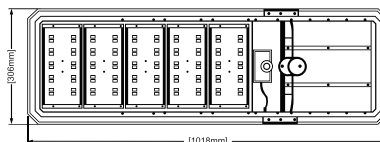

Light Distribution Curve



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

