



STREET LIGHT

ZERON
NEW LIGHT NEW LIFE

All In One Solar Light

ELE-20



3.000K 4.000K 5.000K 6.000K


Specification

Daya (W)	Frequency Amp	LED Efikasi	Total Lumen	CRI	Proteksi	Life Po4 Battery	Charging Time	Material
80W	50/60Hz	160Lm/W	12.800Lm	>80Ra	IP65	12.8V, 192Ah	12 Hours	Die Casting Aluminium
100W	50/60Hz	160Lm/W	16.000Lm	>80Ra	IP65	12.8V, 240Ah	12 Hours	Die Casting Aluminium
120W	50/60Hz	160Lm/W	19.200Lm	>80Ra	IP65	12.8V, 260Ah	12 Hours	Die Casting Aluminium
150W	50/60Hz	160Lm/W	24.000Lm	>80Ra	IP65	12.8V, 288Ah	12 Hours	Die Casting Aluminium


Model : ELE-20-80W



Dimension (mm)

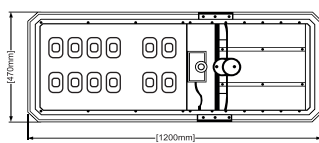


Light Distribution Curve




Model : ELE-20-100W/120W



Dimension (mm)

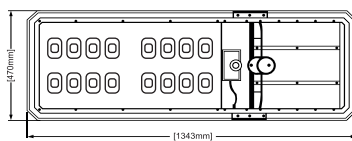


Light Distribution Curve




Model : ELE-20-150W



Dimension (mm)

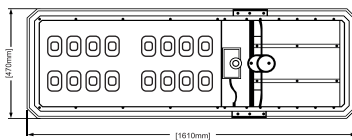

Light Distribution Curve



* Easy maintenance

- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

